

RS521A-E12-RS12U

AMD Single Socket, High Performance 2U Server



2U



1



24*

5th Generation AMD EPYC Processors with AMD 3D V-Cache technology

ASUS RS521A-E12-RS12U was designed to accelerate application performance leveraging accelerator cards and storage scalability. With the CPU and memory configured in a front parallel design that enables efficient airflow for excellent thermal performance, RS521A-E12-RS12U is optimized for rack placement. Featuring the single processor in a 2U chassis, RS521A-E12 series delivers the right-sized rack server dimensions for price sensitive applications and meets the demanding computing requirements.

FEATURE

- 1 x AMD EPYC 9005 Series Processor
- With 24*DDR5 DIMM up to 5200Mhz
- PCIe Gen5 slots
- Max 2x DW GPU cards supported
- Rack-optimized Design
- 12 x 3.5" Hot-swap HDD bays

Industry-leading memory capability

With 2 DIMM per channel design, RS501A-E12 Series supports up to 24 x DIMM slots. The CPU's memory controller supports DDR5 memory with 12 channels up to 5200Mhz . We deliver the industry-leading technology of server memory for our customers' business.

AMD EPYC™ 9005 Series Processors

The RS521A-E12 Series is built on the latest AMD EPYC™ 9005 Series Processor, and designed for the demand of scale-out computing, and wide range of existing and emerging workloads.

The best storage interface combination for software-defined storage management

Front: 12 x 3.5" hot-swap storage bays (supports maximum 12 x 3.5" U.2/U.3 NVMe devices)


Rear: 2 x 2.5" hot-swap storage bays (supports SATA devices)

Comprehensive IT infrastructure management solution

ASMB11-iKVM and ASUS Control Center (ACC Classic)

Target market

- Data center Storage Server
- Enterprise Application

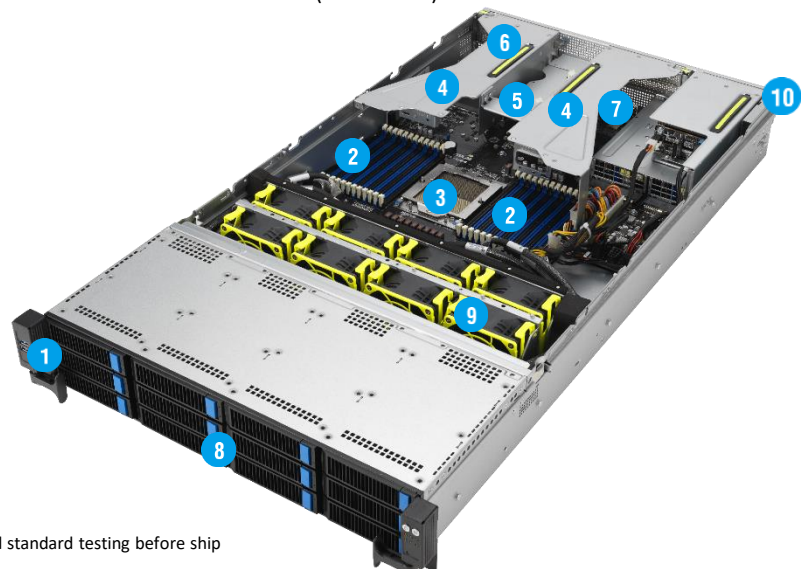

1. Asset Tag
2. 24*DDR5 DIMM up to 5200Mhz
3. AMD EPYC™ 9005 Processor Family (Up to 400W)
3. 2 x PCIe x16 slot(Gen5 x16 link, FHFL) or dual-slot GPU cards
5. 2 x PCIe x16 slot(Gen5 x8 link, LP)
6. 1 x OCP 3.0 Mezzanine (Gen5 x16 link)
7. 1+1 80 PLUS Titanium /Platinum PSUs
8. 12 x 3.5" Hot-swap HDD Bays
9. 4 x Redundant fans (optional)*
10. 2 x Rear-bay support SATAIII

*Please select it when purchasing order and we will have assembling and standard testing before ship

RS521A-E12-RS12U

SPECIFICATION

Processor Support.		1 x Socket SP5 (LGA 6096) Supports AMD EPYC™ 9005 series processors or AMD EPYC™ 9004 series processors, up to 400W, with AMD 3D V-Cache technology
Core Logic		System on Chip (SOC)
Memory	Total Slots	24 12-channel, 2 DIMM per channel
	Capacity	Maximum up to 2,304GB
	Memory Type	AMD EPYC™ 9005 series processors DDR5 5600 RDIMM 2DPC (1 of 2) up to 5200 2DPC (2 of 2, 1R+1R) up to 4400, 2DPC (2 of 2, 2R+2R) up to 4000
	Memory Size	96GB, 64GB, 32GB, 16GB (RDIMM) *Refer to ASUS server AVL for the latest update
Expansion Slots	Total PCIe Slots	Up to 5 PCIe Gen5 slots + 1 OCP3.0
	Slot Type	2 x PCIe x16 slot(Gen5x16 link, FHFL) or dual-slot GPU cards or 4 x PCIe x16 slot(Gen5 x8 link, FHFL) 1 x PCIe x16 slot(Gen5 x8 link, LP) 1 x OCP 3.0 Mezzanine (Gen5 x16 link)
Disk Controller	SATA Controller	CPU Integrated
	SAS Controller	Optional kits: Broadcom Mega RAID 9560-16l ASUS PIKE II 3008 8-port SAS HBA card
Storage Bays		12 x 3.5" hot-swap drive bays 12 x U.2/U.3 NVMe/SATA/SAS *SAS support only from optional SAS HBA/RAID card 2 x 2.5" hot-swap drive bays (Rear-bay support SATAIII) 2 x M.2 socket (Gen4 x4 link or SATA mode, up to 22110 module)
Networking	LAN	1 x Dual Port Intel I350-AM2 Gigabit LAN Controller, 1 x Dedicated Management port
Graphic	VGA	Aspeed AST2600 64MB
Front I/O Ports		2 x USB 3.2 Gen1 ports
Rear I/O Ports		2 x USB 3.2 Gen1 ports, 1 x VGA port, 2 x RJ-45 GbE LAN ports, 1 x RJ-45 Management LAN port
Switch/LED		Front: 1 x Power Switch (w/ LED) 1 x Reset Switch 1 x Location Switch (w/ LED) 1 x HDD Access LED 1 x Message LED LAN 1-2 LED Rear: 1 x Port80 LED (Q-Code) 1 x Power Switch w/ LED 1 x Location Switch w/ LED 1 x Message LED
OS Support		Please find the latest OS support from OS Compatibility Guide ASUS
Management Solution	Software	ASUS Control Center (Classic)
	Out of Band Remote Management	On-Board ASMB11-iKVM for KVM-over-IP
Dimension		840mm x 449mm x 88.1mm (2U) 33.07" x 17.68" x 3.47"
Net Weight Kg (CPU, DRAM & HDD not included)		17.95 kg
Gross Weight Kg (CPU, DRAM & HDD not included, Packing include)		25.14 kg
Power Supply (following different configuration by region)		1+1 Redundant 2000W/1600W 80 PLUS Titanium Power Supply 1+1 Redundant 1200W 80 PLUS Platinum Power Supply
Environment		Operation temperature: 10°C ~ 35°C Non operation temperature: -40°C ~ 70°C Non operation humidity: 20% ~ 90% (Non condensing)

RS521A-E12 Series

SPECIFICATION

Series	RS521A-E12 Series Support Matrix	
Model	RS521A-E12-RS24U	RS521A-E12-RS12U
Processor	1 x Turin CPU or 1 x Genoa CPU	
GPU	Up to 4 single-slot or 2 double-slot GPU cards (RS521A-E12-RS24, 24 NVMe SKU can't support GPU)	
Memory	AMD EPYC™ 9005 series processors 24 x DIMM DDR5 5600/4800/4400/4000/3600 RDIMM/ 3DS RDIMM 2DPC (1 of 2) up to 5200 2DPC (2 of 2, 1R+1R) up to 4400, 2DPC (2 of 2, 2R+2R) up to 4000	AMD EPYC™ 9004 series processors 24 x DIMM DDR5 4800/4400/4000/3600 RDIMM/ 3DS RDIMM 1DPC up to 4800 2DPC up to 4000(1R+1R) 2DPC up to 3600(1R+2R)/(2R+2R)
M.2	2 x PCIe x4 or 2 x SATA	
Fan	Optional Redundant Fan **optional, cannot be purchased separately	
Expansion	[24 x NVMe] 1 x PCIe Gen5 x8, LP + 1 x OCP3.0 (can't support GPU) [16 x NVMe or 12x NVMe] up to 5 PCIe Gen5 slots + 1 OCP3.0 2 x PCIe Gen5 x16, FHFL or 4 x PCIe Gen5 x8, FHFL 1 x PCIe Gen4 x8, LP 1 x OCP3.0 (PCIe Gen5 x16)	up to 5 PCIe Gen5 slots + 1 OCP3.0 2 x PCIe Gen5 x16, FHFL or 4 x PCIe Gen5 x8, FHFL 1 x PCIe Gen5 x8, LP 1 x OCP3.0 (PCIe Gen5 x16)
Storage	24 x 2.5" hot-swap drive bays (optional) -24 x U.2/U.3 NVMe -16 x U.2/U.3 NVMe + 8x SAS/SATA (must use RAID card) -12x U.2/U.3 NVMe + 12x SAS/SATA - 8 x U.2/U.3 NVMe + 16x SAS/SATA 2 x 2.5" hot-swap drive bays (Rear-bay support SATAIII) Support tri-mode Card (Broadcom) *SAS support only from optional SAS HBA/RAID card	12 x 3.5" hot-swap drive bays -12 x U.2/U.3 NVMe + 12x SATA/SAS* 2 x 2.5" hot-swap drive bays (Rear-bay support SATAIII) Support tri-mode Card (Broadcom) *SAS support only from optional SAS HBA/RAID card
NIC	2 x 1GbE RJ45 onboard LAN ports (Intel i350-AM2 controller) 2 x 10Gb OCP Card (Optional) 1 x Management LAN	

* The total number of NVMe drives installed will affect the total number of GPUs that can be installed.